




The main body parts are made of aluminum alloy and then shaped by CNC machines. The surface is treated by powder-coating.

The reflector is heat-resistant and anti-glare and will not discolor in long time and reflectance will not decay either.

Simple design with efficient radiator, suitable for different applications.



IP65

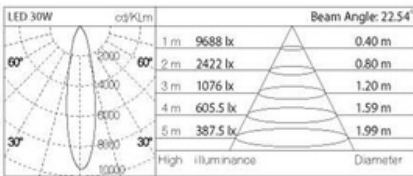


TS901S-LED

CCT: 2700 / 3000 / 3500 / 4000 / 5000 / 6500 K

Power: LED 30W @ DC 36V 840mA Driver
 Input Voltage: AC 220V / 50Hz
 Lumens: 2480 lm
 CRI: 90
 Beam Angle: 22° / 38° / 60°
 Cut Off: 60°
 Control: 0-10V / Dali

IP65

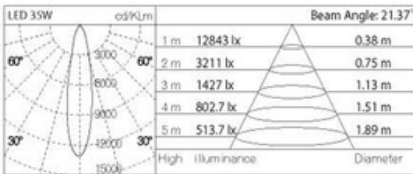


TS901-LED

CCT: 2700 / 3000 / 3500 / 4000 / 5000 / 6500 K

Power: LED 35W @ DC 36V 900mA Driver
 Input Voltage: AC 220V / 50Hz
 Lumens: 3060 lm
 CRI: 90
 Beam Angle: 22° / 38° / 60°
 Cut Off: 60°
 Control: 0-10V / Dali

IP65

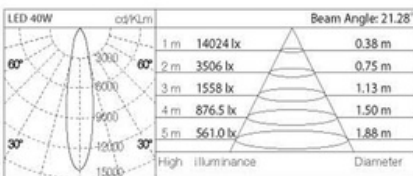


TS901L-LED

CCT: 2700 / 3000 / 3500 / 4000 / 5000 / 6500 K

Power: LED 40W @ DC 36V 1050mA Driver
 Input Voltage: AC 220V / 50Hz
 Lumens: 3368 lm
 CRI: 90
 Beam Angle: 22° / 38° / 60°
 Cut Off: 60°
 Control: 0-10V / Dali

IP65

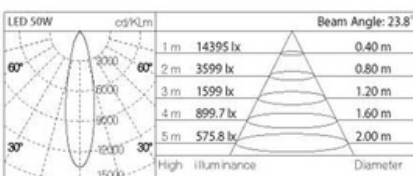

TS901M-LED

CCT: 2700 / 3000 / 3500 / 4000 / 5000 / 6500 K

Power: LED 50W @ DC 36V 1200mA Driver
 Input Voltage: AC 220V / 50Hz
 Lumens: 3680 lm
 CRI: 90
 Beam Angle: 22° / 38° / 60°
 Cut Off: 60°
 Control: 0-10V / Dali

