

## TS-M48-W40 ceiling light

Ceiling light TS-M48-W40 is specially designed for low room heights and limited possibility for separate driver installation. Flat LED driver is installed into fixture construction but still has a possibility for maintenance.

The lighting fixture installation is very simple; fix the baseplate to ceiling, connect wires and twist-lock fixture to the base plate.


Perfect for B-0 or B-15 fire rated ceilings because there is no need for cut-outs in ceiling panels.



### Parameters

Product model	TS-M48-W40
PF	>0.9
Lumen	4400lm
Beam angle	120°
Total Power Consumption	48W
Luminaire Dimensions	Ø600xH25

### Light distribution

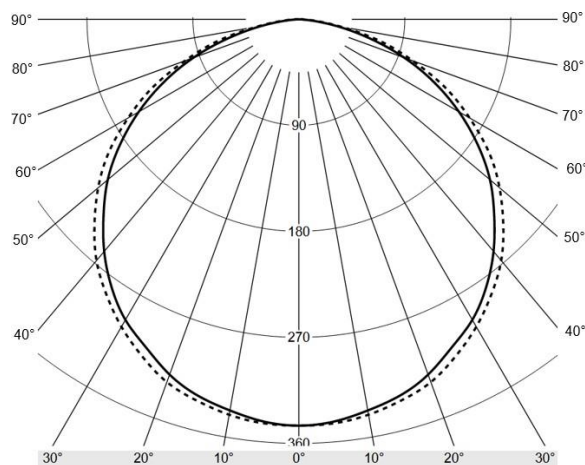

600mm

3000K/ 4000K	80	20	V220- 240	On/ Off
CCT	CRI	IP Level	Input Voltage	Driver Options