

TS600-30 Park light


The TS600-30 series park light is designed for market squares and park lighting where minimal glare is desired.

The luminaire has four (33W/5200lm) or eight (66W/10400lm) deep recessed modules. Robust aluminium body.




Parameters

Product code: TS600-30-830
Luminous flux: 5200 lm
Lighting angle: 65°

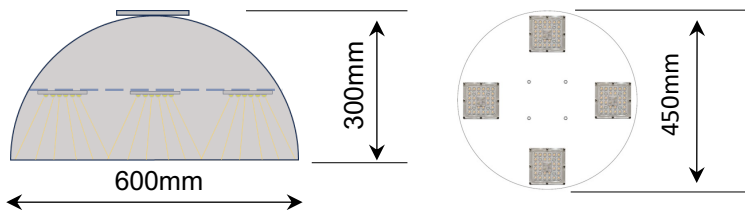

Light distribution

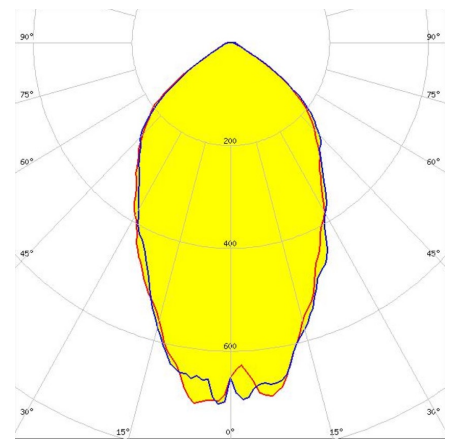

Finnish Ledil optics light distribution

33W	3000K	80	67	V220-240	DALI, 1-10V
Power	CCT	CRI	IP Level	Input Voltage	Dimming