


	REV.	DESCRIPTION	DESIGN	DATE
End product drawing	X1	NEW DRAWING	PDH	10.10.2019




3 Pins

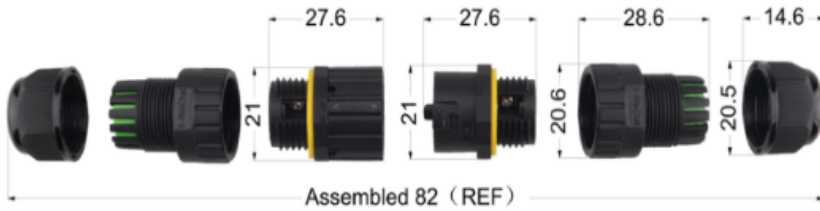

NOTES:

1. MATERIAL: PA66, BRASS, SILICONE;
2. CERTIFICATION: ROHS/TUV/SAA/CE;
3. FIRE-PROOF: UL94-V2.
4. NO DEFECT IN APPEARANCE;
5. UNITS: mm;
6. CONDUCTION TEST: THE THREE ENDS OF THE 3 CORE JOINTS ARE RESPECTIVELY CONNECTED
7. A MAXIMUM CURRENT-CARRYING CAPACITY: 400V/17.5A
 B TEST VOLTAGE: 2500V
 C SUITABLE FOR CABLES CROSS SECTIONS: 0.5-1.5mm²
 D OPERATING TEMPERATURE RANGE: -40~+105°C
 E PROTECTION CLASS: IP68

Silicone parts



∅	Wire OD
∅ 10.2	7-10mm
∅ 6.5	3.5-7mm

Weight	MEAS	Each Cartoon number	G.W						
26.4g	42x30x34	600	16.7kg						
Unlabeled tolerance			UNITS	mm	DRAW	PDH	Part No.	TSEW - M16 - MF03	
X. ±0.35	X.XX ±0.20		X.° ±2°	SCALE	1:1	CHKD	10.10.2019	DWG No.	TSEW - M16 - MF03
X.X ±0.25	X.XXX ±0.10		X.X° ±1°	SHEET	1/1	APPD		TITLE	Waterproof connector