


End product drawing	REV.	DESCRIPTION	DESIGN	DATE
	X1	NEW DRAWING	PDH	10.10.2019



5 Pins

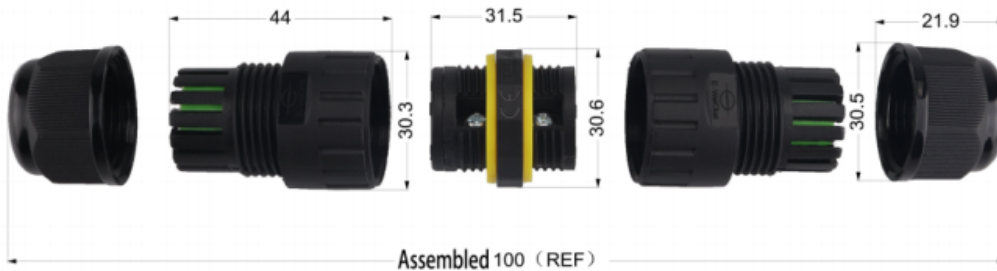


Assembled 100 (REF)

NOTES:

1. MATERIAL: PA66, BRASS, SILICONE;
2. CERTIFICATION: ROHS/TUV/SAA/CE;
3. FIRE-PROOF: UL94-V2.
4. NO DEFECT IN APPEARANCE;
5. UNITS: mm;
6. CONDUCTION TEST: THE THREE ENDS OF THE 5 CORE JOINTS ARE RESPECTIVELY CONNECTED
7. A MAXIMUM CURRENT-CARRYING CAPACITY: 400V/24A  
 B TEST VOLTAGE: 2500V  
 C SUITABLE FOR CABLES CROSS SECTIONS: 0.5-2.5mm<sup>2</sup>  
 D OPERATING TEMPERATURE RANGE: -40~+105°C  
 E PROTECTION CLASS: IP68

Silicone parts



∅	Wire OD
∅ 14	10-14mm
∅ 12	9-12mm
∅ 8.5	5-9mm

Weight	MEAS	Each Cartoon number	G.W						
55.3g	42x30x34	300	17.4kg						
Unlabeled tolerance			UNITS	mm	DRAW	PDH	Part No.	TSEW-M25-5P	
X. ±0.35	X.XX ±0.20		X.° ±2°	SCALE	1:1	CHKD	10.10.2019	DWG No.	TSEW-M25-5P
X.X ±0.25	X.XXX ±0.10		X.X° ±1°	SHEET	1/1	APPD		TITLE	Waterproof connector